

The Ravina Project

Towards a Cooling Planet

Can we get there from here?



Gordon Fraser B.A. (Trent)
Director - The Ravina Project
Toronto, Canada

gord@theravinaproject.org

Twitter: @ravinaproject

2014/03/28
©The Ravina Project
REV 8.3

Blank Page

Towards a Cooling Planet

Abstract

If one considers the amount of potential renewable power available to our civilization, it becomes quite obvious we have more than enough, now and into the foreseeable future. There are many who believe that it is only political will that stops us from cashing in on this natural, clean power bonus. We want to take a closer look at that argument from an industrial capacity point-of-view in this paper.

The question we explore is simply, 'Will our industrial base allow us to rollout and replace with renewables, 50% of our current fossil fueled power generation over the course of 65 years?' We accept the 2010 worldwide totals for the various technologies generating power. We calculate the total power generation relying on fossil fuels. We look at the growth rate renewables must maintain in every 5 year period to reach our goal in 65 years.

At the end of the paper we discuss the implications of our numbers and the industrial output required to achieve our 65-year build-out against a background of complicating factors. And finally, we consider human rationality itself and the role it plays in this vast undertaking.

Introduction

Our goal in this paper is to model the replacement of half our fossil fueled world power supply with renewables in 65 years. We want to look at the hypothesis held by many, that failure to convert the vast majority of our fossil carbon powered generators to renewables is only a political problem. A change in the political emphasis, in their view, would allow us to rollout renewables and thereby reduce the present undesirable level of CO₂ production. The assumption in this belief is, when the political will to rollout renewables occurs, the industrial base and free market will respond with production to make it all happen. Is this assumption even theoretically probable?

All renewable energy is diffuse energy in the sense that a huge collector is required to harvest it. Think about the size of hydro projects, wind/solar farms and the like. The size of renewable collectors is an issue when contemplating a massive industrial/installation rollout because of:

- the huge resources required to build such large structures/machines in large quantities,
- the substantial numbers of trained human talent required to play a part from production of these large machines to their installation/commissioning/operation,
- the considerable surface area these structures inhabit upon the earth's surface,
- the number and length of supply chains required to maintain industrial output and,
- the amount of raw materials used with some being rare and hard to find.

In short there is nothing compact about renewable collectors, they are large and take huge resources to build. Therefore a massive industrial effort will be necessary in this effort.

Assumptions

In writing this paper we have made various assumptions:

- the future is more or less the same as today,
- we place no limits on resource availability other than time,
- we place no weight upon all other parallel activities which must occur to support this project,
- the world will be at least as stable as it is today and,

- we place no weight upon future infrastructure maintenance and creation.

The Future

For the most part, we don't make predictions based upon anything that may happen in the future. We take various totals that are today's (2010) current numbers and extend them into the future using a well-known algorithm from the calculation of compound interest. We assume that there will be no help from another energy source like nuclear fusion. We assume more of the same renewable technologies we currently have today. We ignore all future power generation rollout that is not part of this project and do not include it in our projections of industrial output. We acknowledge some kind of parallel renewables rollout must occur.

Resource Availability

We place no limits on resource availability except for time. The project must be completed in 65 years after starting. In practical terms there are always limits to resource availability. In this paper we want to focus on the pure output required to carry out the project. The idea being that if we see a problem in production/installation/commissioning the energy harvesters with no constraints, then a real world rollout would be problematic.

Technological Development

We see technological development as a driver of efficiencies. Much of the new, planned generation will be circumvented. It may not be needed because of efficiencies and the generation of negawatts. However, there will never be new sources of renewable power; we know them all now. As well, we assume that all technologies that harvest power will be made more efficient over the 65 year life of the project. Efficiencies may also be found in the amount of material substance required to make the huge energy harvesters. Even a few percentage points saved in raw materials required for each of these harvesters will allow for big material savings in the production of hundreds of Gigawatts of harvesters.

Activities accomplished in parallel with this replacement model

All development and industrial output must also support in parallel the following activities:

- providing the new clean energy sources of power we need going forward into the future.
- replacing household fossil fueled furnaces and water heaters with electrical versions in neighbourhoods that will be run totally on electricity,
- upgrading the distribution wiring in those electrified neighbourhoods to support the huge increase in electrical use,
- industrial capacity ramp-up to support the build-out of new future renewable harvesters and the like,
- the grid must be made intelligent with the use of computer automation, huge batteries to level loads and sources, among other things,
- and of course there is the ongoing production of trained manpower.

Our analysis of industrial output to reach our goal of 50% replacement in 65 years ignores all these activities. We acknowledge that there exists the possibility that the industrial output (only partially listed above) may be larger than that required for the model we are building below in this paper.

Stability

In order for us to dig our way out of the fossil powered thermodynamic trap we find ourselves in, our industrial output must produce in ways we, as a species, have never produced before. Stability must be pervasive across economies, suitable labour availability, resources including rare earth elements, funding, supply chains and global politics to name a few. The stability must also transcend assaults on our infrastructure, transportation systems and food supply as the ravages of global warming and social unrest/wars take their toll.

In short, given the huge, daunting industrial rollout we face in the numbers below, we need a 65 year window of stability on all fronts for those countries who are participating in the output and installation. Note that one has to go back in time to the building of the great European cathedrals in order to find projects that spanned more than 50 years in length. One question we face today is, can we be as focused and single minded as they were in the Middle Ages?

Infrastructure maintenance and creation

With increasing energy in the atmosphere and oceans, storms have more to draw upon when they get large. Many aspects of meteorological events involve applying great force to land areas resulting in the destruction of civilization's infrastructure. Those events plus a population growth of 2 billion will require infrastructure focused additions, upgrades and repairs. Infrastructure is one of our civilization's greatest and most expensive artifacts. It is also the most costly to replace.

Industrial Model

Our goal is to understand the industrial effort required. Our model starts with the current numbers and totals for world production of renewable power. Using these current totals we extrapolate into the future using the current percentage of renewable power as a baseline. We plot out using the compound interest present value calculation used in finance to determine the build-out rate for the next 65 years. The nice thing about compound interest calculation is that it starts small but has great potential. Our timeframe is 65 years so we can afford to start small. We see this as helpful in planning an industrial rollout of huge proportions because:

- there is a lead time built in allowing for growth in output to ramp up as manufacturing facilities/techniques are built/developed,
- people are educated/trained into the needed skill sets and
- governments and industry develop tax bases, budgets and business models that support the various projects over very long periods of time.

The World's Power Supply

Thankfully the *U.S. Energy Information Administration's International Energy Outlook 2012 [DOE/EIA-0484(2012) Release date: July 25, 2013]* provides us with a set of numbers for the total world energy consumption. It breaks it out by OECD and non-OECD countries plus it projects the energy usage into the future. Since we are not using any numbers that are projections in this paper, we base our calculations upon the sum of 2010 energy used. From the chart below, the worldwide total energy consumption for 2010 is: 281.7 + 242.3 equals 523.9 Quads (Quadrillion British Thermal Units [BTUs]).

Consider the following chart from that July 25th, 2013 report:

Figure 1. World energy consumption, 1990-2040 (quadrillion Btu)

	Non-OECD	OECD
1990	154.4	200.5
2000	171.5	234.5
2010	281.7	242.3
2020	375.3	254.6
2030	460.0	269.2
2040	535.1	284.6


Like us you may not be familiar with the energy metric, 'Quad'.

One Quad is about equal to the energy in 54 million tons of coal, one trillion cubic feet of natural gas or 170 million barrels of crude oil. On a more practical level for this paper, one Quad is equal to 293.07 Terawatt hours (TWh) or 1.055 Exajoules (EJ) of energy.

If we work with TWh we have to convert from energy to power to get Terawatts in order to plug that value into our charts below. The total for 2010 of 523.9 Quads is equal to 523.9 times 293.1 equals 153,555.1 Terawatt-hours of energy. There are 365 times 24 hours equals 8,760 hours in a year so the size of the world's 2010 power supply was about 153,555.1 TWh divided by 8,760 hours equals about 17.5 TW.

Current World Totals for Renewables

Consider the following graphic

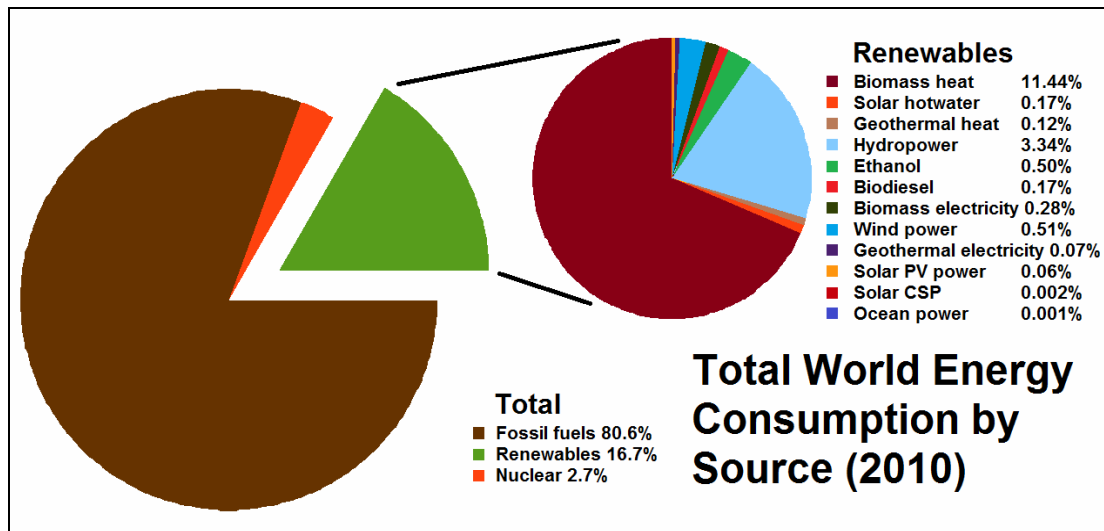

The above graphic is based upon data from, '*REN21 Global Status Report*'.

Total world power supply is 17.5 TW. 80.6% or about 14.1 TW comes from fossil fueled generators. Our goal in this model is to displace half the 14.1 TW with 7 TW of renewable generation over 65 years. The current 2010 total for renewable generation is 16.7% of 17.5 TW or 2,922.5 GW.

On figure TS.10.1 on Page 132 of the Special Report by the IPCC entitled, “*Renewable Energy Sources and Climate Change Mitigation*”, the authors summarize 164 long term scenarios terminating in 2030 and 2050. By 2050 the most aggressive renewable energy production scenarios are charted in Category 1 to give the greenest and lowest atmospheric CO2 result (<400 ppm by 2100). There is a range of outcomes for these scenarios but their Median is about 250 EJ (Exajoules). So how much power in TW does this represent in new renewable generation by the year 2050? We can convert the 250 EJ into Quads at 1.055 EJ per Quad equals 237.0 Quads. One Quad is equal to 293.1 TWh so the total Median energy production from renewables in 2050 in this category is 236.97 Quads times 293.1 equals 69,464.7 TWh. The power supply from renewables by 2050 is therefore 69,464.7 TWh divided by 8,760 hours in a year equals 7.9 TW. This power supply is larger than the project we outline in this paper. We want just 7 TW of new renewables over 65 years not 7.9 TW in 36 years, which is more in about half the time. The high end in this category is 12.7 TW of new renewables by 2050.

We mention this IPCC work to demonstrate that our timeline and renewable build-out are not extraordinary in the least. It compares favourably with the Median of the most aggressive rollout scenarios published by the IPCC.

The industrial challenge we present is to leverage our innovation, free market and industrial prowess to reach our goal.

The charts we have constructed below vary by one non-carbon ingredient, Nuclear Power. Chart one starts off with renewables with no nuclear and chart two includes nuclear power.

Capacity Factor (CF)

It is important to introduce here the idea of Capacity Factor (CF) into this discussion. Each type of generator has a Capacity Factor assigned to it expressed as a percentage. Another value we need to know is ‘Nameplate Capacity’ because it is used in the calculation of Capacity Factor. The Nameplate Capacity is the generator’s maximum power output under idealized conditions. Our solar array’s Nameplate Capacity is 1.5 kW. What is our CF?

The Capacity Factor is a ratio of what is generated over a period of time divided by what the generator could have generated over the same period of time if it was working at maximum (Nameplate Capacity) over the whole period of time. On a particular day we generate 6 kWh in a 24 hour period. Our potential generation is 24 hours times 1.5 kW equals 36 kWh. So our Capacity Factor for that day is 6/36 or 16.7%.

Consider the chart below of 2173 days starting March 1st, 2008 and ending February 11th, 2014. We crunched our daily CF. We see that our CF daily Median of 12.8% is between 12.2% and 13.3%. This value is in line with CF for solar PV at this latitude. Inside the Tropics the CF is about 20%.

n	2173		
Mean	12.29%	Median	12.78%
95% CI	11.97% to 12.61%	95.2% CI	12.20% to 13.33%
SE	0.164%		
Variance	0.59%	Range	28.6%
SD	7.66%	IQR	13.89%
95% CI	7.44% to 7.89%	Percentile	
		0th	0.00% (minimum)

CV	62.3%	2.5th	0.56%	
		25th	5.00%	(1st quartile)
Skewness	0.03	50th	12.78%	(median)
Kurtosis	-1.26	75th	18.89%	(3rd quartile)
		97.5th	25.09%	
Shapiro-Wilk W	0.95	100th	28.61%	(maximum)
p	<0.0001			

Each kind of generator has a CF. When we plan the rollout in the charts below we take the Capacity Factor into consideration for each renewable we consider. Note that the current world power supply of 17.5 TW is power output based upon actual energy consumption. If we want to replace part of that power with 'something else' we need to add in the Capacity Factor to that 'something else' to get its actual power output.

Why is Capacity Factor used by energy planners?

There are many answers to this question but in our opinion, one of the main reasons for using CF is to ensure that the proper amount of utility power generation is available at all times of the day and night. For instance, 20 MW (Nameplate Capacity) of wind powered generation might be installed. Planners might wonder how much energy the new generator will provide over time. Can they plan for 20 MW output all day and night from them? No, because the wind doesn't blow all the time. So how much energy production should they plan for? CF helps out with this calculation. Over a period of time and looking at the data from these kinds of power plants we see that wind power has a CF of about 30%. In some parts of the world like in Denmark their turbines operate with a CF in the high 30s and low 40s. They are the best in the world at the moment.

How do the planners use CF to plan for energy output from the 20 MW of turbines? They take the Nameplate Capacity and multiply it by the Capacity Factor to produce an output that can be relied upon to be there over some period of time. So in theory, their reliable monthly output is not 20 MW times the hours in the month but 0.30 times that value. If the planners need the full 20 MW power output over the month, they would have to install 60 MW of turbines.

We can make this same calculation for solar PV here in Toronto. Note that at our Latitude of 43 degrees, the wintertime is a solar energy killer.

From our continuous data across 6 years, our seasonal Median Capacity Factor breakout is:

- Winter, 3.61% - 5.28%,
- Spring, 12.22% - 15.28%,
- Summer, 18.61% - 20.00% and
- Fall, 11.94% - 14.17%. All ranges for the Median are at >95% Confidence Interval.

A 20 MW solar PV installation here in Toronto would be crippled for about one third the year with very low CF values. We see that the first 25 days of the 90 day long spring season here and the last 25 days of the fall season have essentially the same Median CF as the winter time days. That totals to 140 days of a 365 day year which is 38% of the year.

20 MW of 20% solar PV panels in Toronto made up of 100,000 square meters of solar panels will produce at an average CF of about 7% for 38% of the year. This is brutal. And of course they will not have the same CF as The Ravina Project because our solar array can tilt to plus 70 degrees to let the snow and ice slide off plus drastically improve the power output due to the improved sun angles upon the solar collector's surface. Fixed panels will require winter maintenance to keep snow and ice off their surfaces plus they do not move to leverage as much as possible the low wintertime sun angles upon their surfaces.

Build-out Scenarios

Scenario 1 – Excluding Nuclear Power

Observe the chart below.

Goal to replace 50% of 14 TW with renewables in 65 years							
All renewables no nuclear							
Year	Installed*	GW	GW 5 yr	Sq m area of	Sq km of	5 MW	2 GW
	% of 17.5 TW	Commissioned	build-out	20% solar panels	20% solar PV	Wind Turbines	Hydro
0	16.7%	2922.50					
5	18.3%	3210.73	288.23	7,205,813,572	7,206	170,049	288.2
10	20.2%	3527.39	316.66	7,916,489,353	7,916	186,820	316.7
15	22.1%	3875.28	347.89	8,697,255,771	8,697	205,245	347.9
20	24.3%	4257.48	382.20	9,555,025,539	9,555	225,487	382.2
25	26.7%	4677.38	419.90	10,497,393,138	10,497	247,726	419.9
30	29.4%	5138.69	461.31	11,532,702,058	11,533	272,158	461.3
35	32.3%	5645.49	506.80	12,670,118,667	12,670	299,000	506.8
40	35.4%	6202.28	556.79	13,919,713,371	13,920	328,489	556.8
45	38.9%	6813.98	611.70	15,292,549,772	15,293	360,886	611.7
50	42.8%	7486.01	672.03	16,800,782,623	16,801	396,479	672.0
55	47.0%	8224.32	738.31	18,457,765,445	18,458	435,581	738.3
60	51.6%	9035.45	811.13	20,278,168,754	20,278	478,541	811.1
65	56.7%	9926.58	891.12	22,278,109,950	22,278	525,737	891.1
Totals:			7004.08	175,101,888,013	175,102	4,132,198	7,004
* Installed means commissioned renewable power generation on-line							
Growth rate 1.899% 0.01899 /yr							
Growth periods 5 year plan 5							
EIA Renewables Capacity Factor 33.9%							
Hydro Dam Capacity Factor 50.0%							
EIA Nuclear Capacity Factor 90.0%							
Solar PV Capacity Factor 20.0%							
EIA data is from USA Energy Information Administration 2009							
Days in 5 years 1825							

There is a lot in this chart above so we will unpack it for you.

All current nuclear power will be replaced by renewables in this chart.

The **Year** column indicates the number of years elapsed in the growth plan after the start of the project.

The **Installed*** column denotes the current percentage of the total world's power supply made up of renewables. At year zero, 16.7% of the world's power supply (of 17.5 TW) as we calculated above comes from renewables net any output from nuclear. This percentage is compounded every year at a constant rate of 1.899%. The yearly increase in this column drives the whole chart. The numbers represent the percentage of the 17.5 TW generated by renewables at the end of each 5-year period.

The **GW Commissioned** column totals the current commissioned and producing renewable power supplies in Gigawatts the world-over, based upon the increase in the 'installed' column at the end of each 5-year period.

The column **GW 5 yr build-out** is the number of Gigawatts in total new build-out worldwide across all forms of renewable power generation at the end of each 5-year period.

The column **Sq m area of 20% Solar Panels** converts the 5-year worldwide new build-out total into the required area in square meters of installed, commissioned, on-line 20% efficient solar panels, with a Capacity Factor of 20.0%. If all the build-out occurs at our Latitude of 43 then the area of solar PV panels required will increase dramatically. Arizona has a solar PV CF of about 19%.

The column **Sq km of 20% solar PV** converts the 5-year build-out total into the number of extra square kilometers of collector space if the collectors are photovoltaic panels at 20% efficiency and have a Capacity Factor of 20.0%. The sum encompasses only the new surface area of the required number of panels involved. It does not include room for support structures, wiring, inverters, batteries, grid ties, transformers, transmission lines and the like. Again higher latitudes makes this number larger.

The **5 MW Wind Turbines** column converts the 5-year build-out into the number of state-of-the-art 5 MW wind turbines with a Capacity Factor of 33.9%.

The last column **2 GW Hydro** determines the number of 2 GW hydro plants required to be commissioned and on line to satisfy the 5-year build-out. Note the Niagara Falls', Sir Adam Beck hydro generation station is very close to 2 GW in size. This number represents the total number of Sir Adam Beck power plants built in each 5-year period.

Consider the following chart:

Year	GW 5 yr build-out	sq m per day panel	per day sq km	per day wind turbines	per week 2 GW Hydro*	200 MW Nuclear/wk
0						
5	288.39	3,948,391	3.95	93.18	1.11	6.2
10	316.85	4,337,802	4.34	102.37	1.22	6.8
15	348.11	4,765,620	4.77	112.46	1.34	7.4
20	382.47	5,235,630	5.24	123.55	1.47	8.2
25	420.21	5,751,996	5.75	135.74	1.61	9.0
30	461.67	6,319,289	6.32	149.13	1.77	9.9
35	507.23	6,942,531	6.94	163.84	1.95	10.8
40	557.28	7,627,240	7.63	179.99	2.14	11.9
45	612.28	8,379,479	8.38	197.75	2.35	13.1
50	672.70	9,205,908	9.21	217.25	2.58	14.4
55	739.08	10,113,844	10.11	238.67	2.84	15.8
60	812.01	11,111,325	11.11	262.21	3.12	17.3
65	892.14	12,207,184	12.21	288.08	3.43	19.0

***Adam Beck Hydro generating station at Niagara Falls
is 2 Gigawatts in size.**

The chart above attempts to make the production/installation numbers more comprehensible.

In the **sq m per day panel** column the build-out specifies the area of 20% panels commissioned and on-line per day if solar PV were the only means of harvesting the required GW of renewable power listed in the **GW 5 yr build-out** column.

The **per day sq km** column lists the number of square kilometers covered per day by the solar panels placed on-line and commissioned required to satisfy the panel area calculated in the **sq m per day panel** column. This is, of course, a worldwide total.

The **per day wind turbines** column defines the number of 5 MW wind turbines required each day to be commissioned and placed on-line to satisfy the expansion requirements listed in the **GW 5 yr build-out** column.

The **per week 2 GW Hydro** column lists the number of Sir Adam Becks required per week to satisfy the number of GW in the **GW 5 yr build-out** column.

And finally, there has been quite the discussion about the use of nuclear in the war against CO2 emissions where much has been made about the use of small modular nuke power supplies of about 200 MW in size. Here in this column we calculate the number of **200 MW** commissioned and on-line installations each week that would satisfy the **GW 5 yr build-out** column.

These modular plants would be pre-fabricated on assembly lines not unlike those used to build aircraft although these reactors are orders of magnitude simpler than a large aircraft. They would be small enough to be transported to their sites by truck or even flown in. Molten salt reactors using Thorium operate at normal air pressure and use the high efficiency Brayton Cycle gas turbines because their operating temperatures are in the order of 600-700 degrees C, well above anything using steam generation. These reactors do not need the huge amounts of water for cooling like our solid Uranium based plants nor do they need a huge containment dome because they work at atmospheric air pressure. They need no cooling ponds for spent fuel because they do not use solid fuel, again unlike our current Uranium based reactors.

Scenario 2 – Including Nuclear Power

Observe the chart below.

Goal to replace 50% of 14 TW with renewables in 65 years							
All Renewables plus Nuclear							
Year	Installed*	GW	GW 5 yr	Sq m of 20%	Sq km of	5 MW	2 GW
	% of 17.5TW	Commissioned	build-out	Solar Panels	20% solar PV	Wind Turbines	Hydro
0	19.4%	3395.00					
5	21.1%	3700.28	305.28	7,631,962,883	7,632	180,105	305.3
10	23.0%	4033.01	332.73	8,318,229,245	8,318	196,300	332.7
15	25.1%	4395.66	362.65	9,066,204,701	9,066	213,952	362.6
20	27.4%	4790.91	395.26	9,881,438,136	9,881	233,190	395.3
25	29.8%	5221.71	430.80	10,769,977,389	10,770	254,159	430.8
30	32.5%	5691.25	469.54	11,738,414,122	11,738	277,013	469.5
35	35.4%	6203.01	511.76	12,793,932,718	12,794	301,922	511.8
40	38.6%	6760.78	557.77	13,944,363,583	13,944	329,071	557.8
45	42.1%	7368.71	607.93	15,198,241,230	15,198	358,661	607.9
50	45.9%	8031.31	662.59	16,564,867,598	16,565	390,911	662.6
55	50.0%	8753.48	722.18	18,054,381,055	18,054	426,062	722.2
60	54.5%	9540.59	787.11	19,677,831,613	19,678	464,374	787.1
65	59.4%	10398.48	857.89	21,447,262,900	21,447	506,130	857.9
Totals:			7003.48	175,087,107,175	175,087	4,131,849	7,003
* Installed means commissioned renewable power output							
Growth rate		1.737%	0.01737				
Growth periods		5 year plan	5				
EIA Renewables Capacity Factor		33.9%					
Hydro Dam Capacity Factor		50.0%					
EIA Nuclear Capacity Factor		90.0%					
Solar PV Capacity Factor		20.0%					
EIA data is from USA Energy Information Administration 2010							
Days in 5 years		1825					

All the columns are identical to the first chart except the starting point. The starting point includes nuclear power in the renewable mix even though it is not a renewable form of power. It is included because it is a non-carbon polluting high density power supply which is an important factor in our war on CO2.

Note that the inclusion of nuclear power generation makes the compounded growth smaller in magnitude and therefore easier to manage over the course of the project.

Consider the following chart:

Year	GW 5 yr build-out	per day sq m panels	per day sq km	per day wind turbines	per week 2 GW Hydro*	200 MW Nuclear/wk
0						
5	305.28	4,181,897	4.18	98.69	1.17	6.5
10	332.73	4,557,934	4.56	107.56	1.28	7.1
15	362.65	4,967,783	4.97	117.23	1.39	7.7
20	395.26	5,414,487	5.41	127.78	1.52	8.4
25	430.80	5,901,357	5.90	139.27	1.66	9.2
30	469.54	6,432,008	6.43	151.79	1.81	10.0
35	511.76	7,010,374	7.01	165.44	1.97	10.9
40	557.77	7,640,747	7.64	180.31	2.15	11.9
45	607.93	8,327,803	8.33	196.53	2.34	13.0
50	662.59	9,076,640	9.08	214.20	2.55	14.2
55	722.18	9,892,812	9.89	233.46	2.78	15.4
60	787.11	10,782,373	10.78	254.45	3.03	16.8
65	857.89	11,751,925	11.75	277.33	3.30	18.3
<p>*Sir Adam Beck Hydro generating station at Niagara Falls is 2 Gigawatts in size.</p>						

As above this chart breaks down the industrial output / installed base into more understandable numbers.


As we have noted above, these are world-wide totals. Also note that the GW of renewables brought on-line in every 5 year period is a total for all renewables everywhere on the planet.

Just looking at the numbers it seems that the only technology that could shoulder a large part of the load in this build-out over 65 years are the 200 MW nukes. Large aircraft assembly lines can produce one aircraft a day once the line is filled.

Can we get there from here?

Current Trends

Currently the world produces about 17.5 Terawatts (17.5 trillion Watts) of power with a population of 7 billion people. By the end of this century world population will increase to between 10 and 16 billion people (middle values and ignoring the extremes). Power requirements will probably double more or less to about 30 TW. It could be much more.

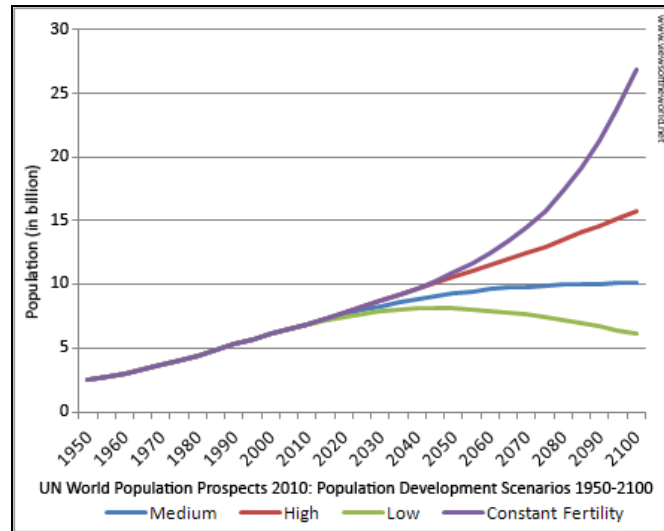

Others, like the U.S. Energy Information Administration in the International Energy Outlook 2012 argue that 27 TW will be passed by 2040 because of the tremendous growth of non-OECD countries.

Figure 1. World energy consumption, 1990-2040 (quadrillion Btu)					
	Non-OECD	OECD	World Total	TW	
1990	154.4	200.5	354.8	11.9	
2000	171.5	234.5	406.0	13.6	
2010	281.7	242.3	523.9	17.5	
2020	375.3	254.6	629.8	21.1	
2030	460.0	269.2	729.2	24.4	
2040	535.1	284.6	819.6	27.4	

Where is 'here' and where is 'there'?

'Here' is where we are, using huge and ever increasing amounts of fossil carbon to power our high technology based, complex civilization.

'There' is where we have displaced 50% of fossil carbon based power sources at current levels or 7 TW in 65 years. We have ignored everything else because 'everything else' produces random noise in the system. We are not interested in the noise. We are interested in the pure signal which means we focus totally on the industrial output required to achieve our goal.

If we find that even in a pure environment our industrial capacity will not be large enough to produce our way out of the fossil carbon based thermodynamic trap we find ourselves in, then a successful real world scenario is also improbable.

Our 'goose may be cooked' right now but we are unaware of it.

Our paper does not explore costs of this rollout, or the financing, or the labour force required, or the transportation requirements, the supply chains, availability of raw materials and etc. All these issues are related, real world issues.

Industrial Output Analysis

What's The Hurry?

In this paper we are talking about industrial output and assumed efficiencies especially in: product, production, paperwork and rollout. But behind this whole nexus of projects, make no mistake, the clock is ticking. Our science has mapped it out for us, and the future, left unchanged from the current state of affairs, looks bleak for civilization as we know it.

In our capital based industrial world, if we fail to innovate as a company our competition will crush us in the market place. If we fail to innovate as a civilization in our present circumstances, the planet itself will crush us.

Time is of the essence. And that is why we have plotted out a 65-year long, focused, industrial effort with a defined goal.

The Build-out Required for Success

Using the numbers generated from the charts above we discuss below the industrial and installation output required to meet the 5-yr targets using each technology exclusively. This of course would not occur in reality. The burden of power generation would be shared on a worldwide basis across all renewable power generation technologies.

200 MW Mini-Nukes

Nuclear power is derived from substances that are a million times more energy dense than chemical reaction based power sources like fossil fuel. Reactors also do not emit carbon and have the largest Capacity Factor (90%). What's not to like? Well, quite frankly, they produce poison.

Notice that there is a difference in the starting points between including and excluding nukes. We have to build-out 305 GW rather than 288 GW in the first 5-year plan based upon the starting percentages of 19.4% which includes nukes and 16.7% which does not. The good thing is that the compounded growth is less with nukes. We look at the weekly worldwide production numbers and we see that they are quite reasonable given our expertise with producing such things as aircraft. These modular mini-nukes are small, have huge energy density and 90% Capacity Factor which makes them base load generation candidates along with geothermal. They are small and less likely to be damaged by high energy weather. From a non-carbon emitting point-of-view, they are a very nice package that could form the backbone of carbon free generation.

288 GW times 1000 MW divided by 0.90 Capacity Factor divided by 200 MW equals 1,600 reactors would have to be built and commissioned in the first 5-yr plan. Since our demonstrated industrial capacity and techniques can be used to build these modular nukes 6.2 built and

commissioned every week for 5 years is entirely possible. Over 4,900 would have to be built and commissioned in the last 5-year period or 19.0 built and commissioned per week.

Our renewable power options may include nukes going forward but we are going to look at the industrial output without nukes because the idea of doing it all with renewables and no nukes is very popular at this time of writing.

Photovoltaic based power harvesting

The sun provides the earth with almost unlimited amounts of power (about 240 W per square meter on average over the whole planet). It is the view of many that this power supply is the one we should invest in to power our civilization into the future.

The 20% Capacity Factor we use is optimistic and latitude/location specific. As we have demonstrated our seasonal Capacity Factor comes close to 20% only in the summertime. The take-a-way here is that assigning a year long average 20% Capacity Factor to solar PV is highly optimistic and probably only accurate in desert regions between the Tropics or very close by. Temperate Latitudes cripple PV power output.

Let's take a look at the industrial output required in our first 5-yr period. At the end of our first 5-year plan we need to manufacture, install and commission PV power plants totaling 288 Gigawatts. This totals to a little over 7 Billion square meters of panels with an installed area on the earth's surface of a little over 7200 square kilometers. In daily terms that means 3.9 Million square meters of panels installed, on-line and commissioned for 5 years. A daily install capacity of 3.9 square kilometers of panels is required to support this output done basically by a worldwide army of installers. The logistics effort will be 'off the charts'.

This is a worldwide effort and must be maintained for 65 years with an increase each year of 1.899% over the previous year. The last year in the project will require the industrial base to manufacture 12,207,184 square meters of panels a day with a rollout/install force able to populate 12.2 square kilometers per day.

5 MW Wind Turbines

We use 5 MW machines because they are the state-of-the-art at this time of writing.

Our industrial base must produce 170,049, five MW wind turbines with an average Capacity Factor of 33.9% in the first 5-year period worldwide to meet the required 288 GW of power build-out. We need an install force able to erect 93 a day for 5 years in the first 5-year plan.

In the last 5-year plan we have to increase our industrial output to 288, five MW turbines per day with an install force capable of erecting the same amount for a total of 525,737 installed and commissioned over the last 5-yr period.

2 GW Hydro

In the first 5-year period we need to build 288, 2 GW hydro plants or 1.11 per week. That will ramp up to 891 plants built in the last 5-year period or 3.8 a week. These are huge installations that integrate a very large number of technologies and engineering skills. Hoover dam is about 2 GW in size. Dams have a Capacity Factor of about 50% on average depending on the water availability. Loss of water levels at the head means dams run at lower power output. Droughts in the dam's catchment area kill hydro power generation.

Factors Complicating Industrial Expansion and Rollout

Right off the top we see several complicating factors that may limit the rate of industrial expansion and installation. The length of the project without even considering the size of the rollout would boggle the mind of a professional project manager. Timescales of this size have a whole host of problems that arise through nothing more than the length of time the project takes until completion. And then of course the generators have to remain *in situ* forever whilst the political and physical climate changes around them, they are upgraded and maintained.

These complicating factor in our view are listed below in no particular order and the list is not exhaustive:

- **Local insurgency** or for a lack of a better word, pissed-off locals. Many of the generators, especially solar would be located in desert regions within the Tropics where the sun is huge and clouds are not a factor but dust is both in the air and accumulates on the panels themselves. The problem is that people live in these 'marginal areas' ... think Sahara desert. Desert areas today usually have some local struggle going on. Placing monster generators, thousands of square km in size and mega tons of copper to bring in the power to urban areas a few thousand km away using hi-voltage DC links seems a bit risky. Copper equals \$\$ in the real world. Solar panels, wind turbines and the like equal target practice.
- **Climate change** will be a factor because it is a factor today all around the world. High energy meteorological events are the nemesis of infrastructure. It is this same infrastructure that will carry the electrons which power our civilization. And further because of the large size of energy collectors they are even more vulnerable to large scale events than smaller ones like nukes and geothermal. So both the generators and transmission lines will have a higher risk. Dams running out of water or used marginally are another example of this phenomenon. We know that increased ambient temperatures drops power output from solar PV panels.
- **Maintenance/upgrades/support** will be an ongoing issue especially at the end of the rollout. Sixty-five years is pushing the longevity limits for most of the technologies we will use to harvest, transmit and distribute energy. Just a decade or so into the rollout will see workers upgrading worn out equipment which we have not accounted for in our chart. So maintenance of the power collecting infrastructure will be an on ongoing requirement shortly after, in relative terms, the start of the project. Such a long project will suffer after the first 20 years or so with problems related to parts availability. Couple obsolescence of technologies, availability of software and parts with local insurgency, dust and climate change means that these complicating factors will make for unprecedented maintenance/upgrade/support complexity.
- **Software bugs** and other issues including **cyber attacks** will have an effect on rollout, integration of technologies and software/hardware/firmware maintenance and upgrades. Over such a long period the version control management will be of paramount importance especially in firmware and other code that is intimately connected with hardware which may or may not be current or up to the proper revision. Source code will have to be ported to different compilers or antique compilers will still have to execute on antique computers for quite some time to maintain antiquated source code.
- **Personnel turnover/ongoing recruitment/training programs** will require a highly advanced form of human resources management. It must span 65 years initially plus provide correct amounts of properly trained people across continents and jurisdictions with their own labour codes, cultures and laws. The programs will have to support the ongoing maintenance/upgrades/support in perpetuity as the installed base of generators and transmission lines/equipment wears out.
- **Revenue management/finance** will require unique business models to accommodate a range of jurisdictions which allow for many different relationships between the power companies and the banking/venture capital communities. The whole issue of financing

this project is unknown at this time. What kind of incentive would entice industry to pour Trillions of dollars into this long term rollout? Could governments offer incentives? But in today's world where austerity and low taxes are the mantra of the day, Governments are more or less broke with declining tax bases and corporate accounts are full of 'dead money'. Therefore it is not at all clear where the financing will come from.

- **Corporate longevity** will require new kinds of corporations that are built from their articles on up to last 65+ years to manage any aspect of this huge, lengthy, project build-out and its subsequent perpetual maintenance demands.

Comments

Well there you have it dear reader. We have used today's numbers and a simple compounding algorithm to start the build-out small, and end big, over a period of 65 years.

What we haven't mentioned is the increase in projected world power supply to around 25 TW by the year 2040 or so. We are introducing it only now because we wanted to use today's numbers in the paper ... that is, to use numbers that are data rather than speculation. But now is the time to speculate. If all the new projected 10 TW of power supply will be renewables then the industrial and install capacity model we have built above must be increased by a factor to account for an extra 10 TW of renewable build-out and install in just 26 years. So we have two programs of industrial and install capacity going in parallel; one we have discussed and the other more aggressive program, more in less than half the time.

For those who believe that impediments to these two projects are just political, we salute your enthusiasm. For us, we believe we have serious cause to rethink any optimism we have about the viability of these two projects. Even if we trim off 50% of the 10 TW of extra power supply needed because of efficiencies we have achieved, in the next 25 years or so we have to account for a 7 TW project over 65 years and a 5 TW project over 25 years hitting our industrial / installation base at the same time.

The more we look at the numbers we feel this whole project is somewhat optimistic in its outlook for success. We are skeptical at this time of writing that anything even close to this industrial output can be maintained if we use renewables alone.

In our opinion after toiling over these numbers for more than a month now, we see only one way out. And it is nothing more than a gamble at this point in time. A chance only ...

From our analysis, Capacity Factor is the key along with power density, that is, power output divided by the size of the generator. Generator size is key to its survival in high energy meteorological events plus a huge advantage when it must be shipped into a remote community ... think mining towns on the arctic circle. A large Capacity Factor means quite literally, the investment in generation gets more 'bang for the buck' over the lifetime of the generator and as well it can be used for base load generation which only fossil plants can provide. High Capacity Factor is beneficial for investors which means they will like the ROI enough to buy into the deal.

So when analyzed using several points-of-view, it seems to us that the numbers reinforce the idea that small nukes should form the backbone of our non-carbon rollout of new generation. They leverage the industrial abilities we have honed over 50 years of aircraft production and they fit our existing industrial models i.e. factory assembled, field installed.

Nukes or not we understand from our numbers that this challenge we face over the rest of the century is a 'crap shoot'.

The dice, in our view, are loaded against us.

Conclusion

If we leave the reader with one idea from this paper it is this; contrary to what people say about renewables replacing fossil carbon sources of power, it is not JUST a political problem. This whole replacement process if successful will take generations to accomplish in a calm, stable world. Unfortunately, the world is going in the other direction on all fronts of human endeavour. So any idea that we can somehow carry out a successful project that may be beyond both our present and future capabilities, against a background of chaotic and sometimes nasty events, seems to be dubious to us.

We see the energy imbalance the earth currently has with space as THE problem for humanity to solve. In fact, we state categorically that if this problem were solved, the complexity of all other problems we face as a species would be dramatically reduced.

Rational Man

We have outlined in the broadest terms the grand project that will/should dominate the rest of the 21st C. In many ways this project can be understood as Humankind's great quest for survival.



We used the word 'should' because, knowing the science, any rational person would not want to be part of a problem which eventually, inexorably leads to the end of civilization as we know it. We have assumed throughout this entire paper that humankind is rational, that is, humanity will respond to this unprecedented existential crisis in a rational way.

The picture above has huge emotional qualities attached to it. In it, the earth has been made anthropomorphic and so has the gun. The earth embodies all the qualities of the natural world, the support mechanisms, processes and physical stuff if you will, that underlie all life on the

planet. The gun and hand represent the forces we have unleashed upon the world, literally terraforming it into some kind of natural environment foreign to us and ultimately, foreign to our survival as a species.

We disagree with the interpretation of the artistic message presented above in one important and fundamental way. We do not see the gun threatening the world as implied in the art. Humanity cannot now nor ever 'threaten' the planet's existence. Only much larger cosmic forces have the potential to do that ... like our sun going into a nova state, evaporating the oceans and leaving the earth a cinder ball.

We interpret the art on a larger scale than just what is confined to the canvas. We interpret the face and the hand as being part of the same entity. Humanity is part of this earth in every possible way of measuring that fact. There is nothing that humanity can do that is 'un-natural', that is we must obey all natural laws; we have no choice. Humanity is now and in the future part of nature. So our interpretation of the art is that humankind and the civilization it thrives within, is in the process of dying by its own hand ... facing suicide not by killing nature ... which is absurd ... but by killing the ability of the natural world to support humanity ... which is not absurd, it's quite probable.

The great project outlined above requires, above all else, the response to this human induced suicide be rational.

However, we know from our science, history, philosophy, social sciences and lately from our investigations into the inner workings of the human brain using the new fMRI technology that humanity is not rational. "From our science" is an interesting phrase to use in light of the attacks upon science we are seeing from many quarters including religion and politics. We read the arguments which diminish the authority of science because of conflicting belief in the case of religion, or conflicting ideology, in the case of politics. Either way belief trumps knowledge.

In a paper presented to the Society for Personality and Social Psychology in California, January 2006, Drew Weston, author of the book, "*The Political Brain*", said the following:

"We derive pleasure from irrationally sticking with beliefs against evidence ... There are flares of activity in the brain's pleasure centers when unwelcome information is being rejected ... activity spiked in the circuits involved in reward, a response similar to what addicts experience when they get a fix."

David Hume (1711-1776) expressed a similar sentiment,

"Reason is and ought to be the slave of the passions."

The bottom line is that emotions always win in a struggle with rationality. In the tension between scientific knowledge and belief from whatever source, beliefs will win on an individual scale and, on the political scale, they will triumph in the form of ideology and reinforcing propaganda.

The implications for the struggle humanity faces during the rest of this century are profound. It looks like the epic project we plot out above must be matched with an equally epic project which leverages human emotions or at least deals with human irrationality in some way to support this project.

In short, there is as much work to do 'in ourselves' as there is to build energy harvesters 'in the world'. It seems that these two efforts cannot be separated. To have a chance for civilization's survival after the 21st C we have to complete two separate but intimately related projects, one 'without' in the world, and the other 'within', our collective soul.

It will be humanity's physical and spiritual struggle for the Ages.

"If we knew what we were doing, it would not be called research."
- A. Einstein

Project Directors

Susan Fraser B.A., M.SW. (U of Toronto)
Gordon Fraser B.A., MCSE, CCDP (Trent U)

The Ravina Project,
Toronto, Ontario,
Canada M4J3L9

gord@theravinaproject.org

Twitter: @ravinaproject

Friends of the Ravina Project

Ben Rodgers B.A., M.A.,
NABCEP Certified Solar PV Installer™
Designer of our sun altitude compensating, solar array structure